WATERSHED BIOASSESSMENT REPORT

SAND CREEK WATERSHED

Decatur, Jennings, and Bartholomew Counties

2003

Study Conducted By:

Commonwealth Biomonitoring
8061 Windham Lake Drive
Indianapolis, Indiana 46214

(317) 297- 7713

TABLE OF CONTENTS

EXECUTIVE SUMMARY

A rapid bioassessment of the benthic macroinvertebrate communities of Sand Creek and its tributaries in Decatur, Jennings, and Bartholomew Counties of Indiana was conducted in 2003. The purpose of the assessment was to document the biological condition of the streams as part of a watershed management program.

Fifteen sites were examined in the Sand Creek watershed, as well as a "reference" stream (Graham Creek) in the same ecoregion. The study showed that turbidity, nutrient concentrations, and E.coli levels are relatively low at most sites in the watershed during "base flow" (dry weather) conditions. However, these parameters are much higher during "storm flow" conditions at most sites. Some of the water chemistry results indicate the potential for high algal productivity in the watershed.

Aquatic habitat in the watershed is generally good. Few of the study streams are channelized and a zone of riparian vegetation is still in place along most streams.

The biological community of Muddy Fork near Greensburg was severely impacted by degraded water quality. The effects of this degradation can be measured in Sand Creek as far as 20 miles downstream.

Bear Creek, Nettle Creek and Gas Creek were moderately impacted. In contrast, one site on Wyaloosing Creek had habitat and a biological community among the best in Indiana. The Sand Creek watershed still supports a few species of live mussels, which are indicators of good water quality.

Causes of water quality degradation, as indicated by biological indicators, probably included low dissolved oxygen concentrations (2 sites), excessive nutrient concentrations (1 sites), and excessive sediment inputs (3 sites).

Recommendations to improve conditions in the watershed include (1) concentrating restoration efforts on Muddy Fork, (2) seeking a Lake and River Enhancement grant for a lake diagnostic study of Greensburg Reservoir and the Muddy Fork watershed, (3) targeting additional management efforts on Gas Creek, Bear Creek, and Nettle Creek, and (4) using appropriate best management practices to solve the unique problems identified in each sub-watershed.

INTRODUCTION

A 319 nonpoint source grant was awarded to the Decatur County Soil and Water Conservation District to prepare a watershed management plan for the Sand Creek watershed of southern Indiana. Sand Creek is on the Indiana Department of Environmental Management's list of "impaired waterbodies" [1] and the preparation of a management plan is part of the process of restoring water quality. One important component of the grant was to conduct a series of bioassessments in these streams. Bioassessments are recognized as a valuable tool in identifying water quality problems and helping diagnose their causes [2]. Certain animals are sensitive to different types of stresses. Comparison of the numbers and kinds of animals present can give important clues about the presence of toxic substances, excessive sedimentation, excessive nutrient inputs, or low dissolved oxygen concentrations.

This project was designed to characterize the chemical, biological and physical (aquatic habitat) integrity of the Sand Creek watershed. Questions to be answered include:

What is the overall ecological health of these watersheds?

Are unhealthy streams affected primarily by degraded water quality or by degraded habitat?

Are water quality parameters within normal ranges for aquatic life?

Where are water quality problems present?

What can be done to make the identified problems better?

Local Setting

The Sand Creek watershed (Fig. 1) lies in the southernmost part of the "Eastern Corn Belt Plain" ecoregion of the East-central United States [3]. This area is composed of a glacial till plain manteled in many places with loess. Stream valleys are generally shallow with narrow valley floors. Constructed ditches and channelized streams are common because much of the ecoregion has poorly drained soils. The natural vegetation consists of a mosaic of bluestem prairie and oak/hickory forest. However, a great majority of the land in this ecoregion is used for agriculture, primarily for corn and soybeans [3].

Figure 1.
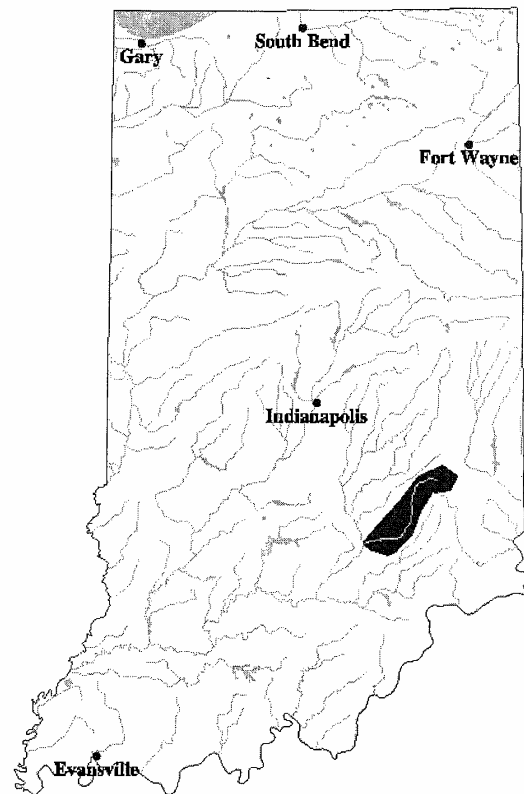
The Present Study

To document the biological integrity of the watershed, fifteen sites were chosen for study (Fig. 2). A sixteenth site outside the watershed (Graham Creek) was used as a "reference."   Site locations were as follows:

	Stream	Latitude	Longitude	Drainage Area (mi^2) [10]
Site 1	Muddy Fork CR 50 S	39.19.71	85.30.92	17
Site 2	Gas Creek SW CR 60	39.19.69	85.29.20	4
Site 3	Cobb's Fork CR 60 E	39.13.84	85.31.25	19
Site 4	Sand Creek CR 700 S	39.13.99	85.31.61	61
Site 5	Panther Creek CR 1100 S	39.09.89	85.32.66	9
Site 6	Wyaloosing Creek CR 1300 S	39.08.71	85.36.74	11
Site 7	Bear Creek CR 300 S	39.09.60	85.41.85	15
Site 8	Sand Creek CR 500 W	39.08.00	85.34.46	122
Site 9	Sand Creek CR 250 W	39.05.09	85.39.48	146
Site 10	Wyaloosing Creek CR 360 W	39.05.55	85.41.05	36
Site 11	Bear Creek CR 500 W	39.04.72	85.42.29	23
Site 12	Sand Creek CR 650 N	39.04.71	85.45.24	224
Site 13	Nettle Creek CR 650 N	39.04.80	85.46.54	6
Site 14	Rock Creek CR 650 N	39.04.71	85.47.17	14
Site 15	Sand Branch CR 900 S	39.04.23	85.50.45	5
Site 16	Graham Creek CR 600 E	38.56.85	85.30.11	46

Fig. 2. Location of Study Sites
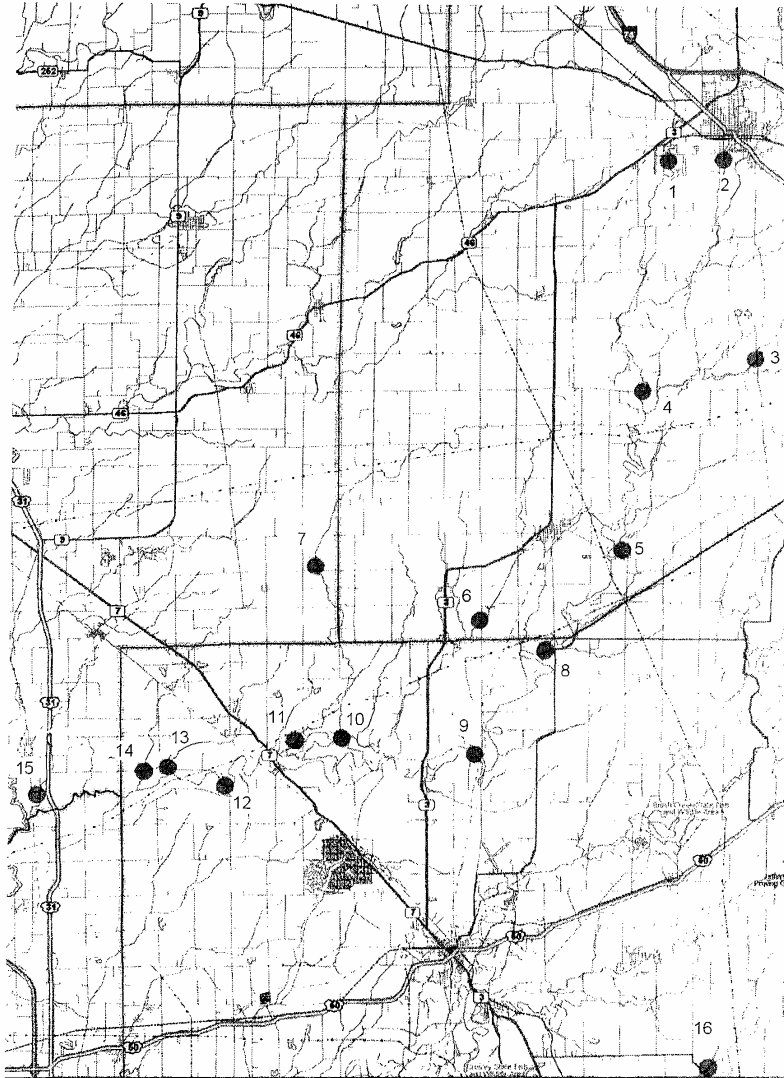
METHODS

WATER CHEMISTRY

Water chemistry measurements were made twice at each site. One set of measurements was made at "base flow" when no storm water runoff had occurred during the previous week. A second set of measurements was made at "storm flow" immediately following a storm event.

Dissolved oxygen was measured by the membrane electrode method. The pH measurements were made with a Cole-Parmer pH probe. Conductivity and temperature were measured with a Hanna Instruments meter. All instruments were calibrated in the field prior to measurements.

Samples for nutrient and bacteria analysis were collected as grabs and returned to the lab for analysis. E.coli were measured by the membrane filtration method, using m-coliblue as the growth medium. Nitrate and phosphorus were measured by spectrophotometry. Ammonia was measured by the ion-specific probe method.

AQUATIC COMMUNITY

Because they are considered to be more sensitive to local conditions and respond relatively rapidly to change, benthic (bottom-dwelling) organisms were chosen to document the biological condition of the streams. The U.S. Environmental Protection Agency (EPA) has recently developed a "rapid bioassessment" protocol [4] which has been shown to produce highly reproducible results that accurately reflect changes in water quality. The bioassessment technique relies upon comparison of the aquatic community to a "reference" condition (streams of similar size in the same geographic area which are least impacted by human changes in the watershed). Graham Creek in Jennings County was used as the reference in this study, since previous sampling has shown this stream to support a very diverse and pollution-sensitive aquatic community [9].

Habitat Evaluation

The aquatic habitat at each study site was evaluated according to the method described by Ohio EPA [8]. This method's results assigns values to various habitat parameters (e.g. substrate quality, riparian vegetation, channel morphology, etc.) and results in a numerical score for each site. Higher scores indicate higher aquatic habitat value. The maximum value for habitat using this assessment technique is 100.

Sample Collection

Macroinvertebrate samples in this study were collected by dipnet in riffle areas where current speed approached 30 cm/sec. All samples were preserved in the field with 70% ethanol and returned to the lab for sorting and analysis. Mussels were identified in the field and returned to the river.

Laboratory Analysis

In the laboratory, a 100 organism subsample was prepared from each site by evenly distributing the animals collected in a white, gridded pan. Grids were randomly selected and all organisms within grids were removed until 100 organisms had been selected from the entire sample.

Each animal was identified to the lowest practical taxon (usually genus or species). As each new taxon was identified, a representative specimen was preserved as a "voucher." All voucher specimens will ultimately be deposited in the Purdue University Department of Entomology collection.

Data Analysis

Following identification of the animals in the sample, ten "metrics" are calculated for each site. These metrics are based on knowledge about the sensitivity of each species to changes in environmental conditions and how the benthic communities of unimpacted ("reference") streams are usually organized. For example, mayflies and caddisflies are aquatic insects which are known to be more sensitive than most other benthic animals to degradation of environmental conditions. A larger proportion of these animals in a sample receives a higher score. The sum of all ten metrics provides an individual "biotic score" for each site.

The metrics used in this study were those recommended by U.S. EPA Protocol III. Individual metrics are shown below:

SCORING VALUES FOR METRICS
U.S. EPA RBA Protocol III.

	6 points	4 points	2 points	0 points	
# of Genera	>80	60-80	40-60	<40	*
Hilsenhoff Biotic Index	<5	5 - 6	6 - 7	>7	
Scaper/Filterer Ratio	>50	35-50	20-35	<20	*
EPT/Chironomid Ratio	>75	50-75	25-50	<25	*
% Dominant Taxon	<20	20-30	30-40	>40	
EPT Index	>90	80-90	70-80	<70	*
Community Loss Index	<0.5	0.5-1.5	1.5-4	>4	
% Shredders	>50	35-50	20-35	<20	*

* = study site score / reference site score x 100

Because the index scores for macroinvertebrates and habitat result in different maximum values, they are difficult to relate to each other. Therefore, both indices were eventually converted to a normalized score of 0 to 100 using the following formula:

Normalized Score = Actual Score / Maximum Possible Score x 100

RESULTS

Water Chemistry

Tables 1 and 2 show a summary of all the water chemistry data collected at the 16 sites examined in this study:

Table 1
Water Quality Measurements (Base Flow) - 200 cfs on Clifty Creek at St. Paul
May 27, 2003

Site	D.O. mg/l	pH SU	Cond uS	Temp C	ChlA ug/l	Turb NTU	NO3 mg/l	NH3 mg/l	PO4 mg/l Total	PO4 mg/l Ortho	E.coli /100 ml
Muddy Fork Site 1	9.8	8.4	500	23.6	286	9.4	12.0	<0.1	0.20	0.16	52
Gas Creek Site 2	9.4	8.0	1070	22.4	38	3.5	13.0	0.6	0.98	0.90	412
Cobb's Fork Site 3	10.0	8.7	410	20.0	41	3.1	5.0	<0.1	0.09	0.06	57
Sand Creek. Site 4	10.1	8.8	520	21.1	36	2.4	10.0	0.1	0.11	0.09	31
Panther Cr. Site 5	10.1	8.7	340	19.4	17	1.8	2.2	<0.1	0.07	0.05	140
Wyaloosing Cr. Site 6	9.2	7.9	400	22.8	76	13.6	13.0	0.1	0.25	0.22	201
Bear Creek Site 7	10.0	8.5	400	21.1	136	3.9	14.0	0.1	0.20	0.17	324
Sand Creek Site 8	10.2	8.6	470	20.6	28	3.5	10.0	<0.1	0.09	0.07	51
Sand Creek Site 9	10.2	8.6	490	20.0	35	3.8	8.5	<0.1	0.11	0.08	14
Wyaloosing Cr. Site 10	9.7	8.2	470	18.3	20	5.6	7.0	<0.1	0.12	0.08	81
Bear Creek . Site 11	9.9	8.4	480	17.8	18	5.0	10.5	<0.1	0.10	0.08	126
Sand Creek. Site 12	9.7	8.3	490	18.3	32	5.5	11.0	<0.1	0.19	0.15	33
Nettle Creek Site 13	9.2	8.2	470	17.8	14	3.5	2.8	<0.1	0.18	0.14	148
Rock Creek Site 14	9.0	8.0	470	17.2	22	3.6	6.0	<0.1	0.10	0.08	62
Sand Branch Site 15	9.1	8.1	440	16.6	16	8.2	9.0	0.2	0.08	0.05	245
Graham Creek Site 16	9.1	8.3	320	18.8	23	3.7	2.1	<0.1	0.10	0.07	7

Table 2
Water Quality Measurements (Storm Flow)
3000 cfs on Clifty Creek at St. Paul
June 13, 2003

Site	D.O. mg/l	pH SU	Cond uS	Temp C	ChlA ug/l	Turb NTU	NO3 mg/l	NH3 mg/l	PO4 mg/l Total	PO4 mg/l Ortho	E.coli /100 ml
Muddy Fork Site 1	8.6	7.1	390	19.7	249	635	6.3	1.2	0.44	0.34	4220
Gas Creek Site 2	9.5	7.3	420	19.0	30	5.0	9.8	0.2	0.48	0.35	83
Cobb's Fork Site 3	10.0	7.5	420	18.9	97	55.3	8.3	0.2	0.45	0.38	4800
Sand Creek Site 4	9.7	7.5	390	20.3	210	295	9.8	0.2	0.40	0.34	2560
Panther Cr. Site 5	10.0	7.7	370	19.6	78	11.6	8.6	0.5	0.58	0.49	529
Wyaloosing Cr. Site 6	9.1	7.7	400	19.8	43	16.4	13.0	0.1	0.56	0.44	152
Bear Creek Site 7	8.5	7.8	400	17.4	64	21.1	20.0	0.1	0.21	0.18	233
Sand Creek Site 8	9.5	7.8	420	19.5	225	213	9.8	0.4	0.46	0.35	540
Sand Creek Site 9	8.5	7.8	410	20.5	248	310	5.4	0.5	0.72	0.63	640
Wyaloosing Cr. Site 10	8.6	7.8	500	19.3	72	24.0	16.5	0.1	0.40	0.32	129
Bear Creek Site 11	8.7	7.8	370	18.4	77	32.7	16.5	0.3	0.18	0.15	238
Sand Creek. Site 12	8.1	7.9	400	20.0	191	221	4.9	0.4	0.16	0.10	440
Nettle Creek Site 13	9.4	7.8	400	20.7	58	16.6	3.8	1.2	0.61	0.52	192
Rock Creek Site 14	9.7	7.9	420	21.2	68	16.1	7.7	0.2	0.46	0.42	337
Sand Branch Site 15	8.7	7.9	410	23.7	32	8.4	14.0	0.7	0.32	0.23	226
Graham Creek Site 16	7.9	7.9	500	20.0	86	21.1	2.0	1.3	0.49	0.42	831

D.O. = Dissolved Oxygen
Cond. = Conductivity
ChlA = Chlorophyl a
Turb. = Turbidity
NH3 = Ammonia (as Nitrogen)
NO3 = Nitrite + nitrate (as Nitrogen)
PO4 = Phosphate (as Phosphorus)

Table 3. Additional Water Quality Measurements
August 4-5, 2003

	D.O. mg/l	pH SU	Cond. uS	Temp. (C)
Site 1 (Muddy Fork) 8/4, 4:50 p.m.	12.4	7.9	440	25.0
Site 2 (Gas Creek) 8/4, 4:30 p.m.	10.7	7.9	990	23.0
Site 3 (Cobbs Fork) 8/4, 3:30 p.m.	10.0	8.2	440	22.5
Site 4 (Sand Cr.) 8/4, 4:00 p.m.	10.6	8.3	770	23.0
Site 5 (Panther Cr.) 8/4, 2:30 p.m.	9.2	8.1	360	21.0
Site 6 (Wyaloosing Cr.) 8/4, 1:10 p.m.	7.8	7.9	500	23.5
Site 7 (Bear Cr.) 8/5, 2:30 p.m.	10.6	8.1	530	23.5
Site 8 (Sand Cr.) 8/4, 12:30 p.m.	9.0	8.0	400	23.0
Site 9 (Sand Cr.) 8/5, 1:30 p.m.	9.9	8.4	460	24.0
Site 10 (Wyaloosing Cr.) 8/5, 12:45 p.m.	7.5	7.8	340	22.0
Site 11 (Bear Cr.) 8/5, 12:00 noon	8.4	7.8	370	24.5
Site 12 (Sand Cr.) 8/5, 11:20 a.m.	8.7	7.9	460	22.5
Site 13 (Nettle Cr.) 8/5, 11:00 a.m.	8.9	8.0	490	20.5
Site 14 (Rock Cr.) 8/5, 10:00 a.m.	8.2	7.8	480	22.0
Site 15 (Sand Branch) 8/5, 9:30 a.m.	8.3	7.6	500	19.5
Site 16 (Graham Cr.) 8/4, 10:30 a.m.	8.7	7.7	390	23.0

D.O. = Dissolved Oxygen
Cond. = Conductivity
Temp. = Temperature in Degrees Centigrade

Aquatic Habitat Analysis

When the EPA habitat scoring technique was used, the following aquatic habitat values were obtained for each site in the study:

Table 4. Aquatic Habitat

		QHEI Score	Normalized Score
Site 1	Muddy Fork	42	57
Site 2	Gas Creek	62	84
Site 3	Cobb's Fork	62	84
Site 4	Sand Creek upstream	59	80
Site 5	Panther Creek	62	84
Site 6	Wyaloosing Creek upstream	67	91
Site 7	Bear Creek upstream	48	65
Site 8	Sand Creek middle	77	104
Site 9	Sand Creek middle	70	95
Site 10	Wyaloosing Creek downstream	71	96
Site 11	Bear Creek downstream	68	92
Site 12	Sand Creek downstream	71	96
Site 13	Nettle Creek	60	81
Site 14	Rock Creek	66	89
Site 15	Sand Branch	43	58
Site 16	Graham Creek	74	100

Quality assurance duplicate evaluation done at site 16 resulted in identical habitat scores. This indicates that the bioassessment technique was producing reliable, reproducible results during the study period.

DISCUSSION

Water Chemistry

During "base flow" conditions, phosphorus and E.coli levels were relatively low at most sites. Only three sites had E.coli levels exceeding the Indiana water quality standard. Nitrate concentrations exceeded the proposed nitrogen criterion of 2 mg/l at all sites. Chlorophyl concentrations were somewhat elevated at site 1 (Muddy Fork) and site 7 (upper Bear Creek), indicating high algal productivity. Another indication of high algal productivity during base flow was the high number of sites with pH exceeding 8.5. High pH often occurs when photosynthesis rates are high on warm, sunny days.

"Storm flow" conditions were associated with much higher phosphorus and E.coli concentrations in the watershed. During storm flow, all sites exceeded the proposed nutrient phosphorus criterion of 0.1 mg/l and 10 sites exceeded the Indiana water quality standard for E.coli. Turbidity was very high at site 1 (Muddy Fork) during storm flow conditions.

Aquatic Habitat

Aquatic habitat index values ranged from 42 to 77 at the 16 study sites. According to this scoring scheme, most sites in the watershed have generally "good" aquatic habitat. Two sites were "excellent," eleven were "good," and three were "fair." The site with worst aquatic habitat (site 1 on Muddy Fork) was artificially channelized and had no shading canopy. Only three sites had artificially altered channels. Unchannelized headwater streams are rather rare in Indiana and should be protected wherever possible.

Figure 3.

Sand Creek Watershed Habitat
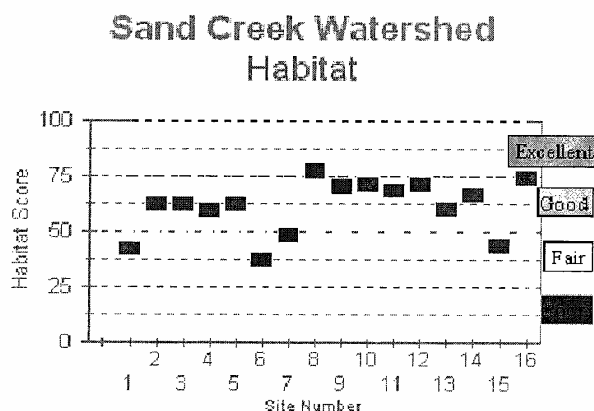
Sand Creek Watershed Mussels

Species represented by live or "fresh dead" (fd) specimens

> *Lampsilis siliquoidea*
> *Amblema plicata*
> *Lampsilis cardium*
> *Toxolasma parvus*
> *Utterbackia imbecillis*
> *Fusconia flava*

Other species present, represented by weathered dead (wd) shells

> *Actinonaias ligamentina*
> *Anodontoides ferussacianus*
> *Elliptio dilatata*
> *Lasmigona complanata*
> *Lasmigona compressa*
> *Lasmigona costata*
> *Pyganodon grandis*

Site 1. Muddy Fork-*U. imbecillis* 1 fd
Site 2 Gas Creek-no mussels
Site 3 Cobbs Fork-*L. siliquoidea* wd valves
Site 4 Sand Creek-*L. cardium* 1 fd *L. siliquoidea* and *A. ferussacianus*-wd valves
Site 5 Panther Creek-1 valve fragment; probably *A. ferussacianus*
Site 6 Wyaloosing Creek-no mussels
Site 7 Bear Creek- *T. parvus*-1 fd   *P. grandis*-wd 1 valve
Site 8 Sand Creek-*A. plicata* 2 fd and 2 valves fd
> *L. siliquoidea* numerous wd valves
> *L. costata, A. ligamentina, , L. cardium, F. flava*-1 wd valve each
Site 9. Sand Creek-*A plicata* 1 fd
> *L. costata, E. dilatata, L. cardium, P. grandis, L. siliquoidea, A. ligamentina, F. flava,*
> *L. complanata* wd valves only
Site 10 Wyaloosing Creek-*L. siliquoidea* wd valves
Site 11 Bear Creek-no mussels
Site 12 Sand Creek-not surveyed for mussels due to high and turbid water conditions
Site 13 Nettle Creek-no mussels
Site 14 Rock Creek- *L. siliquoidea* 1 live; 1 fd; 2 wd valves
Site 15 Sand Branch-no mussels
Site 16 Graham Creek (reference site)-*F. flava* 1 fd ; 1 wd valve
> *L. cardium* 1 fd and fd valve (juvenile)
> *L. siliquoidea* 1 fd and wd valves
> *L. compressa* 1 wd valve; *A. ligamentina* wd valves

Macroinvertebrate Communities

The most commonly collected species were riffle beetles, caddisflies (Hydropsychidae), mayflies (Baetidae and Heptageniidae), and midge larvae. Flatworms or blackflies were dominant at two sites.

The normalized biotic index scores ranged from 9 to 87. Four sites fell in the "excellent" category, eight sites were "good," two sites were "fair," and one site had "poor" biotic integrity.

Figure 4

Sand Creek Watershed
Biotic Value

-■- Excellent -■- Good -■- Fair
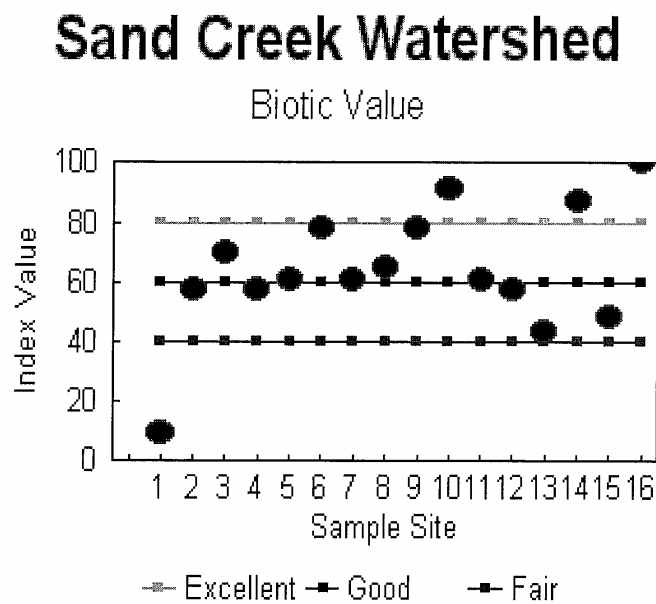
Diagnosis

One of the most useful aspects of biological monitoring is the ability to use information on the way aquatic animals respond to different types of stress to diagnose a problem. For example, when aquatic habitat and biotic integrity are graphed in relation to each other, they form a straight line unless water quality is degraded [4]. Plus or minus 10% can be added to the graph to allow for a certain

degree of measurement error. When values fall outside this range, water quality problems are suspected. A comparison of biotic integrity to habitat is shown in Figure 5. This figure suggests that five study sites had degraded water quality. Site 1 (Muddy Fork) deviated most highly from the expected relationship and therefore had the worst water quality. Others with moderately degraded water quality were site 2 (Gas Creek), site 11 (Bear Creek), and site 13 (Nettle Creek).

Figure 5

Sand Creek
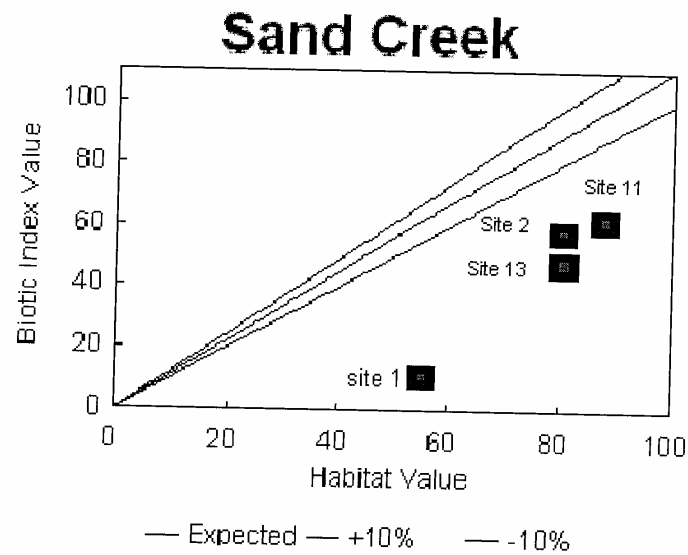
Three sub-watersheds were dominated by species known to be tolerant to sediment deposition. These are shown in yellow in Fig. 6. Best management practices in these areas should focus on sediment control.

Fig. 6
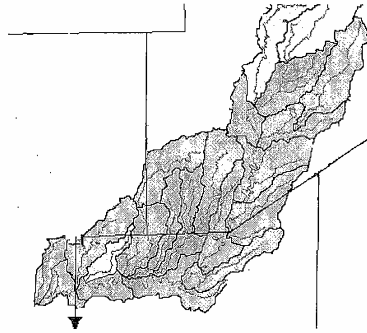
Excessive nutrient inputs are often indicated by a dominance of animals which eat algae ("scrapers"). Dominance by riffle beetles, snails, and certain kinds of mayflies are especially good indicators of this type of impairment [4]. Site 7 (upper Bear Creek) was dominated by scrapers and had the highest nitrate concentrations during both base flow and storm flow conditions. The sub-watershed represented by this site is shown in Figure 7. Best management practices in the Bear Creek area should focus on nitrogen and phosphorus reduction.

Figure 7
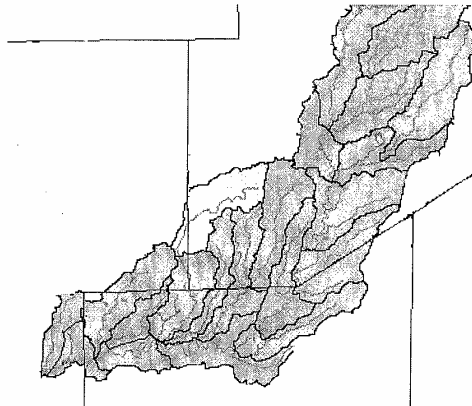
Low dissolved oxygen concentrations can often be determined by examining the Hilsenhoff Biotic Index for a particular site. This index, which ranges between 0 and 10, is especially suitable for the diagnosis of sewage-related pollution [6]. Sites with values greater than 7 frequently have dissolved oxygen concentrations below 4 mg/l (the minimum Indiana water quality standard). Sub-watersheds which may be affected by low dissolved oxygen are shown in red in Figure 8. Best management practices in these areas should focus on sewage or manure handling.

Figure 8
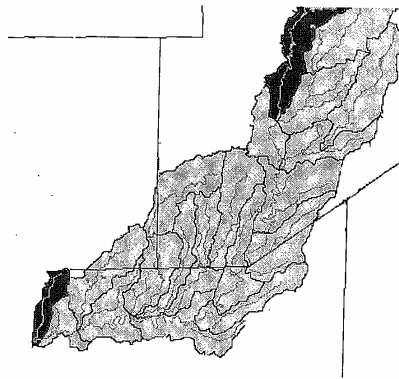
The detrimental affect of low water quality in Muddy Fork on the remainder of the Sand Creek watershed can be seen in Figure 9. Muddy Fork's biotic index value was 48 points lower than it's value predicted by the aquatic habitat available there. This water quality depression was also observed in Sand Creek for at least 20 miles downstream, as measured by similarly low "observed vs. predicted" biotic index values in Sand Creek.

Fig. 9
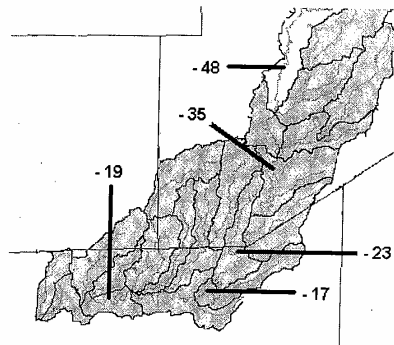
RECOMMENDATIONS

1. Concentrate restoration efforts on Muddy Fork. It has severe water quality problems (sediment runoff, high organic load) that can affect the remainder of Sand Creek downstream.

2. Team with the City of Greensburg and apply for an IDNR Lake and River Enhancement grant for Greensburg Reservoir. A lake diagnostic study would help find sources of impairment in the watershed upstream from the lake and would eventually result in water quality improvements to the lake itself.

3. Other tributaries requiring a lesser degree of attention include Gas Creek, Bear Creek, and Nettle Creek.

4. Focus appropriate best management practices to solve the unique problems identified in each watershed:

    Muddy Fork - Sediment control, nutrient control, organic inputs, habitat restorations
    Gas Creek - Sediment control
    Bear Creek - Nutrient control, habitat restorations (upper watershed)
    Nettle Creek - Sediment control
    Sand Branch - Organic inputs, habitat restorations

LITERATURE CITED

1. Indiana Department of Environmental Management. 2002. Indiana 303(d) List for 2002. Office of Water Management, Indianapolis IN.

2. Karr, J.R. et al., 1986. Assessing biological integrity in running waters: a method and its rationale. Illinois Natural History Survey Special Publication 5, 28 pp.

3. Omernik, J.M. and A.L. Gallant. 1988. Ecoregions of the Upper Midwest States. U.S. EPA Environmental Research Laboratory, Corvallis, OR. EPA/600/3-88/037.

4. Plafkin. J.L., M.T. Barbour, K.D. Porter, S.K. Gross, and R.M. Hughes. 1989. Rapid bioassessment protocols for use in streams and rivers. U.S. EPA Office of Water, Washington, D.C. EPA/444/4-89-001.

5. Schneider, A.F., 1966. Physiography of Indiana. In: Natural Features of Indiana. Indiana Academy of Science, Indianapolis, IN

6. Hilsenhoff, W.L., 1987. An improved biotic index of organic stream pollution. Great Lakes Entomologist 20:31-39.

7. Simon, T.P. and R. Dufour. 1997. Development of Index of Biotic Integrity expectations for the ecoregions of Indiana. V. Eastern Corn Belt Plain. U.S. Environmental Protection Agency, Region V, Environmental Services Division, Chicago, IL. EPA 905/9-96/00

8. Ohio EPA. 1987. Biological criteria for the protection of aquatic life: Vol. II. Users manual for biological field assessment of Ohio surface waters. Div. of Water Quality Monitoring and Assessment, Columbus, OH.

9. Harmon, J.L. 1992. Survey of the freshwater mussels of Big Creek and quantitative evaluation of state-listed mussel species in Big and Graham Creeks. Ind. Dept. Nat. Res., Nongame and Endangered Wildlife Program, Indianapolis, IN. 53 pp.

10. Hoggatt, R.E. 1975. Drainage areas of Indiana streams. U.S. Geological Survey, Water Resources Division, Indianapolis, IN. 231 pp.

Sand Creek Watershed Benthos - 2003

	SITE 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Chironomidae	37	19	26	17	12	11	18	15	9	9	9	10	12	11	78	5
Simuliidae		8	2	2	32	11	4		1	2	6		63	12		3
Tipulidae		4								3						
Empididae		1	2							2					1	
Tabanidae					1											
Ephydridae																
Elmidae	3	3	8	5	2	9	20	21	21	26	24	20	2	9	2	7
Psphenidae					1											
Tricorythodidae								1	8			4				
Caenidae			3												1	
Heptageniidae			1	1	3	2		12	10	2	2	30	1	7	1	6
Baetidae		7	23	45	29	38	31	12	7	2	18	10	12	9	6	8
Isonychia				1						1						5
Ephemeridae																1
Hydropsychidae		55	34	29	19	27	22	38	43	52	41	25	9	42	11	59
Hydroptilidae									1							
Philopotamidae						1				1			1	7		5
Perlidae																
Megaloptera			1									1				1
Anisoptera																
Zygoptera								1								
Sphaeridae							2									
Physidae																
Ferrissia																
Lymnaeidae																
Amphipoda																
Isopoda							1									
Decapoda					1	1								3		
Nematoda																
Hirudinea		3					2									
Oligochaeta																
Turbellaria	60															
TOTAL	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100

Data Analysis for Macroinvertebrates

METRICS

	Site #				
	1	2	3	4	5
# of Genera	3	8	9	7	9
Hilsenhoff Biotic Index	8.0	5.7	6.0	5.8	5.3
Scraper/Filterer Ratio	0.0	0.0	0.3	0.2	0.1
EPT/Chironomid Ratio	0.0	3.3	2.3	4.5	4.3
% Dominant Taxon	60	55	34	45	32
EPT Index	0	2	5	4	3
Community Loss Index	2.7	0.6	0.3	0.6	0.6
% Shredders	0	4	0	0	1

SCORING

	Site #				
	1	2	3	4	5
# of Genera	0	6	6	4	6
Hilsenhoff Biotic Index	0	4	4	4	4
Scraper/Filterer Ratio	0	0	6	6	4
EPT/Chironomid Ratio	0	2	0	2	2
% Dominant Taxon	2	4	6	4	6
EPT Index	0	0	4	2	0
Community Loss Index	2	4	6	4	4
% Shredders	0	6	0	0	2
SCORE	4	26	32	26	28
NORMALIZED SCORE	9	57	70	57	61

Data Analysis for Macroinvertebrates

METRICS

	Site #				
	6	7	8	9	10
# of Genera	8	8	7	8	10
Hilsenhoff Biotic Index	5.5	5.9	5.6	5.5	5.4
Scraper/Filterer Ratio	0.3	0.7	0.9	0.7	0.5
EPT/Chironomid Ratio	6.2	2.9	4.2	7.7	6.4
% Dominant Taxon	38	31	38	43	52
EPT Index	4	2	4	5	5
Community Loss Index	0.5	0.8	0.7	0.6	0.4
% Shredders	1	0	0	0	3

SCORING

	Site #				
	6	7	8	9	10
# of Genera	6	6	4	6	6
Hilsenhoff Biotic Index	4	4	4	4	4
Scraper/Filterer Ratio	6	6	6	6	6
EPT/Chironomid Ratio	4	2	2	6	4
% Dominant Taxon	6	6	6	4	4
EPT Index	4	0	4	6	6
Community Loss Index	4	4	4	4	6
% Shredders	2	0	0	0	6
SCORE	36	28	30	36	42
NORMALIZED SCORE	78	61	65	78	91

Data Analysis for Macroinvertebrates

METRICS

	Site #					
	11	12	13	14	15	16
# of Genera	6	7	7	8	7	10
Hilsenhoff Biotic Index	5.4	5.6	5.0	5.2	7.0	5.0
Scraper/Filterer Ratio	0.6	2.0	0.0	0.3	0.3	0.2
EPT/Chironomid Ratio	6.8	6.9	1.9	5.9	0.2	17
% Dominant Taxon	41	31	63	42	78	59
EPT Index	4	4	4	4	4	6
Community Loss Index	0.8	0.7	0.6	0.5	0.7	0.0
% Shredders	0	0	0	3	0	3

SCORING

	Site #					
	11	12	13	14	15	16
# of Genera	2	4	4	6	4	6
Hilsenhoff Biotic Index	4	4	6	4	2	6
Scraper/Filterer Ratio	6	0	0	6	6	6
EPT/Chironomid Ratio	4	4	0	4	0	6
% Dominant Taxon	4	6	2	4	2	2
EPT Index	4	4	4	4	4	6
Community Loss Index	4	4	4	6	4	6
% Shredders	0	0	0	6	0	6
SCORE	28	26	20	40	22	44
NORMALIZED SCORE	61	57	43	87	48	100

Habitat Evaluation Breakdown

Site Number

	1	2	3	4	5	6	7	8
SUBSTRATE	7	12	10	8	10	12	7	12
COVER	2	7	6	7	8	8	7	11
CHANNEL	7	12	12	13	14	13	10	13
RIPARIAN	5	8	6	5	7	8	4	10
POOL/RIFFLE	7	9	11	9	8	10	8	11
GRADIENT	6	8	8	6	8	8	4	8
DRAINAGE AREA	8	6	9	11	7	8	8	12
TOTAL	42	62	62	59	62	67	48	77

Site Number

|	9	10	11	12	13	14	15	16
SUBSTRATE	10	9	10	10	10	11	7	10
COVER	10	10	10	11	8	8	5	11
CHANNEL	13	13	11	13	12	14	5	13
RIPARIAN	7	9	7	9	11	8	6	11
POOL/RIFFLE	10	12	11	9	6	9	7	11
GRADIENT	8	8	10	6	6	8	8	8
DRAINAGE AREA	12	10	9	13	7	8	6	10
TOTAL	70	71	68	71	60	66	43	74

BIOASSESSMENT SUMMARY
Sand Creek Watershed

Purpose

To measure the ecological integrity of
of the Sand Creek watershed. Both chemical
and biological technques were employed.
Bioassessment uses knowledge of the
biology of stream-dwelling animals to
measure stream health.

Watershed Characteristics

The watershed is more heavily forested
than most others in Indiana. The City of
Greensburg is in the upper part of the
watershed.

Results

Water quality and habitat are among the
best in Indiana at one site. Other sites
are affected by degraded water quality
or habitat. Greatest impairment is in
Muddy Fork. Water quality problems
include excessive nutrients,
sedimentation, and low
dissolved oxygen.

50
25 75
0 100
■ Sand Creek Biota
▨ Sand Creek Habitat

Recommendations

Concentrate restoration efforts on
Muddy Fork.

Watershed Gauge
A score of 100 is our goal

Date: 2003

August 3, 2001

Ms. Linda Schmidt
IDEM (IGC-N1255)
100 North Senate Ave.
Indianapolis, IN 46206

Dear Ms. Schmidt,

I am submitting water quality assessment information collected for the Sand Creek Watershed in
Decatur Co. The attached documents include descriptions of sampling sites and methods,
experience level of monitors, and other supporting information. As we are using the Hoosier
Riverwatch program for our monitoring, most of the data can also be found in their database.
You should also have received data in Excel files by email.

If you have any further questions, please contact me at 812-663-8685 ext. 3. Thank you for your
interest in our monitoring program.

Sincerely,

Andrea S. Bongen
Project Coordinator

Enclosures

Water Quality Monitoring Program

11-Digit HUC: 05120206-030
START DATE: October 1999
QAPP: ARN—98-104 (Approved by IDEM 10/29/99)

SUMMARY:
The Sand Creek Watershed Project began monitoring four sites in October and November of 1999. The initial coordinator, Brian Ingmire submitted a QAPP to IDEM and enlisted the help of three area high school classes in monitoring three of the sites. There was a short lapse in monitoring during the summer of 2000, while the project was without a coordinator. The current coordinator, Andrea Bongen, resumed the testing in October of 2000. Monitoring is planned to continue through 2003.

METHOD:
Advanced chemical (HACH), physical and biological testing are carried out according to Hoosier Riverwatch (HR) guidelines and our QAPP. There is always a Level II certified monitor present during sampling.

TRAINING: The coordinator and two of the three high school teachers involved received Level II certification under the HR program. Some students also received level I or II certification. At the beginning of each semester, the coordinator spends up to three class periods instructing students on water quality issues and testing methods.

DATA REPORTING:
The new Hoosier Riverwatch database came on line in November of 2000. All current tests results are entered directly into the database, which can be searched and viewed by anyone with Internet access. Original data sheets are still kept on file at the Decatur Co. SWCD. Old data is still in the process of being entered.

Sand Creek Watershed
Water Quality Monitoring Program

Site 1 (HR site #68)—Muddy Fork
HUC: 05120206-030-030
Lon: 85 deg 30 min 53 sec W
Lat: 39 deg 21 min 4 sec N
Intersection of Muddy Fork and C.R. 100 North

Results:

Date	CQHEI*	PTI**	WQIR***	Flow-cfs	Dissolved Oxygen-ppm,% Sat	E. Coli-col/mL	pH	BOD5-mg/L	Temp Δ	Phospate, Total-mg/L	Nitrate-mg/L	Turbidity-NTU's
10/19/99			78	.54	12.1, 115%	100	8	—	1	.2	4.4	—
11/12/99			65	—	10, 85%	600	8.5	3	-1.1	0.6	8.8	—
3/15/00			56	5.74	16.5, 135%	1000	6.7	3.7	.5	.9	50.6	—
5/15/00		12	53	11.42	11, 130%	900	7.9	2.8	.5	2.3	75.2	—
11/1/00	57	25	71	21.2	13, 122%	475	8.3	1	0	.2	30.8	—
12/05/00			58	—	15.5, 117%	25	8.1	1.5	—	.13	30.8	—
2/20/01	52	20	53	6.9	14, !30%	4500	8	0	—	.24	30.8	—
3/28/01			61	2.36	17.5, >140%	75	8.3	3	—	.15	22	—
4/18/01	55	11	68	6.01	16, 130%	8	8.3	1	—	.8	40	—
5/23/01			65	6.36	12.5, 125%	330	8.1	1.5	—	.3	33	—
6/8/01			79	37.05	10.5, 110%	0	7.8	2.5	—	.35	35	—

* Citizens Qualitative Habitat Index—Hoosier Riverwatch method for assessing physical characteristics; there is no rating scale for results at this time.

** Pollution Tolerance Index —Hoosier Riverwatch rating for macroinvertebrate sampling: 23 or more is Excellent, 17-22 is Good, 11-16 is Fair, 10 or less is Poor.

*** Water Quality Index Rating—Hoosier Riverwatch rating of chemical test results: 90%-100% is Excellent, 70%-90% is Good, 50%-70% is Medium, 25%-50% is Bad, <25% is Very Bad.

Sand Creek Watershed
Water Quality Monitoring Program

Site 2 (HR site #71)—Gas Creek
HUC: 05120206-030-010
Lon: 85 deg 29 min 14 sec W
Lat: 39 deg 19 min 25 sec N
On property of Dan Roach, 850 S C.R. 60 SW

Results:

Date	CQHEI*	PTI**	WQIR***	Flow-cfs	Dissolved Oxygen-ppm,% Sat	E. Coli-col/mL	pH	BOD5-mg/L	Temp Δ	Phospate, Total-mg/L	Nitrate-mg/L	Turbidity-NTU's
10/28/99			59		9, 93%	1200	7.8	3.5	.5	1	65.8	—
12/2/99			63		8.25, 80%	3000	8.2	—	8.5	2	61.6	—
12/7/99			45		9, 87%	3800	8.8	3.5	8.8	4	59.4	—
1/15/00			51		10.5, 93%	1400	7.8	3.2	8.4	13	48.4	—
2/12/00			51		7, 58%	1200	8.1	2.5	4	1.3	31.5	—
3/11/00			51		8.5, 80%	1200	8.75	—	2	1.8	39.6	—
4/8/00			51		14, 130%	12000	7.8	—	3	3.2	35.2	—
5/18/00			60		9, 105%	1100	7.6	2.1	1	2.1	44.1	—
10/7/00	81		63		10, 105%	5860	7.9	—	5	1.45	3.96	—
11/11/00		19	56	31.7	8.3, 76%	4250	7.8	.3	4	4.6	3.1	—
12/9/00			62	—	9.7, 82.3%	—	7.3	1.67	5	4.3	4.4	—
2/10/01			63	—	10.7, 98%	300	7.6	3	8	2.4	3.52	—
3/10/01		9	57	11.93	8.3, 68.3%	1266	7.5	1	2	3.5	18	—
4/7/01			64	21.48	9.5, 95%	1071	7.7	3.67	4.5	3.5	1.5	—
5/5/01	83	15	59	10.44	6.3, 63%	—	7.7	2.67	-2	5	23	—
6/16/01			72	13.86	9, 100%	0	7.8	6	—	2	16	—

* Citizens Qualitative Habitat Index—Hoosier Riverwatch method for assessing physical characteristics; there is no rating scale for results at this time.

** Pollution Tolerance Index —Hoosier Riverwatch rating for macroinvertebrate sampling: 23 or more is Excellent, 17-22 is Good, 11-16 is Fair, 10 or less is Poor.

*** Water Quality Index Rating—Hoosier Riverwatch rating of chemical test results: 90%-100% is Excellent, 70%-90% is Good, 50%-70% is Medium, 25%-50% is Bad, <25% is Very Bad.

Sand Creek Watershed
Water Quality Monitoring Program

Site 3 (HR site #116)—Cobbs Fork
    HUC: 05120206-030-060
    Lon: 85 deg 31 min 14 sec W
    Lat: 39 deg 13 min 47 sec N
    Intersection of Cobbs Fork and C.R. 60 SW

Results:

Date	CQHEI*	PTI**	WQIR***	Flow-cfs	Dissolved Oxygen-ppm,% Sat	E. Coli-col/mL	pH	BOD5-mg/L	Temp Δ	Phospate, Total-mg/L	Nitrate-mg/L	Turbidity-NTU's
10/21/99			71		15.5, 137%	100	8	—	.7	.14	13.2	—
11/4/99			74		12, 109%	100	8.3	2.5	1	.14	11	—
2/7/00			77		15.5, 90%	20	7.8	2.2	1	.18	13.2	—
3/9/00			63		15.5, >140%	50	7.8	2.1	1	.2	50.6	—
4/10/00			86		11.5, 110%	0	7.5	—	2	.2	13	—
5/20/00			78		8.5, 95%	20	7.3	1	1	.2	36	—
10/25/00			63	14.98	8, 93%	50	7.4	.5	0	.05	6	—
2/1/01	61	7	77	42.69	13, 96%	57	7.9	2	—	.05	.7	63
3/14/01			73	38.04	16, 120%	50	8.3	2	—	.05	8	40
4/30/01			60		13.5, >140%	1039	8.3	4	—	.2	3	—
5/10/01		15	74	24.38	13, 140%	150	7.6	4	—	0	1	0
6/22/01			67	58.33	10, 110%	0	8.1	5	—	.8	>44	80

* Citizens Qualitative Habitat Index—Hoosier Riverwatch method for assessing physical characteristics; there is no rating scale for results at this time.

** Pollution Tolerance Index —Hoosier Riverwatch rating for macroinvertebrate sampling: 23 or more is Excellent, 17-22 is Good, 11-16 is Fair, 10 or less is Poor.

*** Water Quality Index Rating—Hoosier Riverwatch rating of chemical test results: 90%-100% is Excellent, 70%-90% is Good, 50%-70% is Medium, 25%-50% is Bad, <25% is Very Bad.

Sand Creek Watershed
Water Quality Monitoring Program

Site 4 (HR site #69)—Sand Creek
  HUC: 05120206-030-030
  Lon: 85 deg 32 min 44 sec W
  Lat: 39 deg 10 min 0 sec N
  At covered bridge, just north of C.R. 1100 S and Sand Creek intersection

Results:

Date	CQHEI*	PTI**	WQIR***	Flow-Cfs	Dissolved Oxygen-ppm,% Sat	E. Coli-col/mL	pH	BOD5-mg/L	Temp Δ	Phospate, Total-mg/L	Nitrate-mg/L	Turbidity-NTU's
11/10/99			74	6.96	12.5, 115%	0	8.9	2.5	0	1	19.8	—
12/7/99			75		16.5, 123%	0	8.5	2.5	1.1	.8	22	—
3/10/00		17	64	9.67	15.5, 142%	0	8	3.2	1	1.3	44	—
5/20/00			61	23.27	12, 135%	200	8.1	2	0	1.5	33	—
10/12/00	47		71		11, 113%	100	8.5	1	—	.54	22	—
11/29/00			59		18, 140%	250	8.4	2	—	.48	30.8	—
2/28/01			65		17, 135%	541	8.5	1.5	—	.28	15.25	—
3/30/01			76		14, >115%	66	8.6	0	—	.08	11	—
4/30/01			—		16.5, >140%	396	8.4	—	—	.35	9	—
5/29/01			68		11, 120%	198	8.3	1	—	.3	30	—
6/22/01			67		10, 110%	0	7.9	6	—	1.5	13	100

* Citizens Qualitative Habitat Index—Hoosier Riverwatch method for assessing physical characteristics; there is no rating scale for results at this time.

** Pollution Tolerance Index —Hoosier Riverwatch rating for macroinvertebrate sampling: 23 or more is Excellent, 17-22 is Good, 11-16 is Fair, 10 or less is Poor.

*** Water Quality Index Rating—Hoosier Riverwatch rating of chemical test results: 90%-100% is Excellent, 70%-90% is Good, 50%-70% is Medium, 25%-50% is Bad, <25% is Very Bad.